

### MHTi-NODE-90-CCCV010

The Inspextor platform is a **PoE Lighting Management System** providing building automation and data collection. PoE systems are safe and efficient low voltage platform.

#### FEATURES

- Fixture Agnostic up to 72 Watts - Internal or Optional Remote Mount
- Engineered to Respond to the MHTi - Peripheral Communication Network
- RS485 Protocol
- 0-10V External Driver Control
- 0-24V analog input
- Automatic Network Discovery
- Ultra High Electrical Conversion efficiency of 98%
- Supports Optional MHTi Battery Backup
- Features a Dimming Range of 1% to 100%
- Dual channel color tuning fixture support

#### GENERAL INFORMATION

Warranty	5 Year Limited Warranty (Covers Standard Components)
Finish	White Powder Coating
Construction	Sheet Metal
Certifications	   

#### NODE POWER INPUT CHARACTERISTICS


Input Voltage	40-60Vdc
Peak Operating Power	80W max
Nominal Standby Power	1.35W
PoE Input Connection	Unshielded female RJ45 jack for CAT5e/6/6A cable to PoE PSE device.
Device Type	Class 2 electrical device

#### NODE DRIVER CHARACTERISTICS

Output Channel	Flexible power and control options are available for either up to eight individual fixtures using the MHTi-SPLT-1x4 splitter or for two-channel fixtures
Driver Design	<b>CC Mode:</b> Common anode constant current LED driver design <b>CV Mode:</b> Common ground constant voltage LED driver design
Dimming	Full range 1% to 100% dimming control in 1% increments via PWM or CVR (Constant Voltage Resolution)
Output Voltage Range	34-44VDC and 12-48VDC for constant current/constant voltage version
Rated Output Power	<b>Constant Current Mode:</b> <ul style="list-style-type: none"> <li>Dual Channel Output: 72 watts</li> <li>Single channel Output: 60 watts</li> </ul> <b>Constant Voltage Mode:</b> <ul style="list-style-type: none"> <li>Channel Output: 70 watts @ 48V,36V</li> <li>Channel Output: 60 watts @ 24V</li> <li>Channel Output: 40 watts @ 12V</li> </ul>
Protection	Individual LED driver channels have current limit and short circuit protection
Connections	Unshielded female RJ45 jack for CAT5e/6/6A cable to PoE PSE device.

#### NODE AUXILIARY DEVICE CHARACTERISTICS

Power Supply	24Vdc/1 Amps
Communication	0-10V
Sensor Inputs	0-24V Analog input
Connections	Spring Cage Clamp

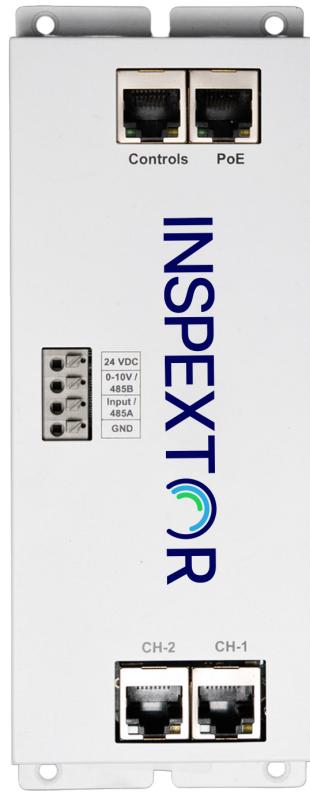

Inspextor is a **PoE Lighting Management System** providing building automation and data collection. **Integrate:** connect your building's systems and technology in one easy-to-use software rather than trying to manage them all separately. **Monitor:** use the dashboard to monitor data collected on your building's energy usage, air quality, occupancy, and more. **Automate:** create automations that streamline your building's operations, work towards green building initiatives, and improve environments for your occupants.

 **MHT Technologies**

**Innovation Lab:**  
241 W. 37th St., Suite 1202, New York City, NY 10018

**HQ & Warehouse:**  
1961 Richmond Ter, Staten Island, NY 10302


Tel: 718 524 4370

[www.mht-technologies.com](http://www.mht-technologies.com)



MHT Technologies, reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

## PRODUCT DIMENSION

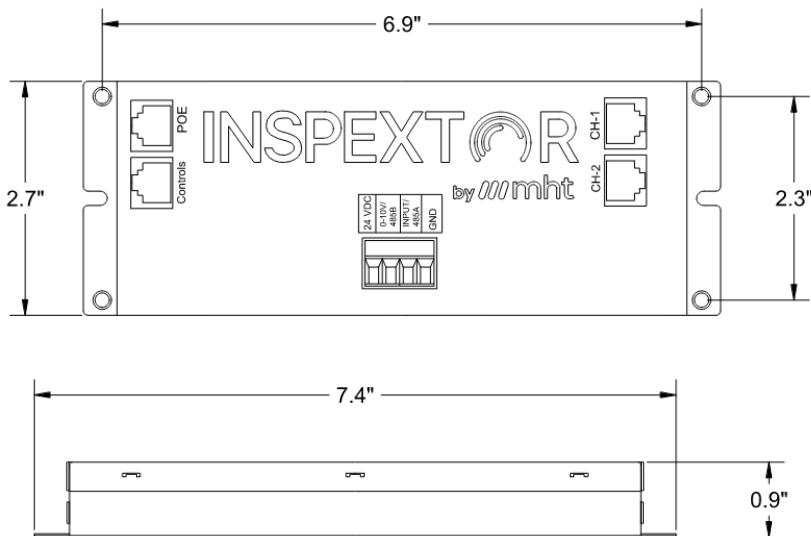

### MHTi-NODE-90-CCCV010 I/O Points

I/O LABEL	Termination Type	Notes
24VDC	Phoneix	Enabled
0-10V/485B*	Phoneix	0-10V Enabled
INPUT/485A*,**	Phoneix	Input Enabled
GND	Phoneix	Enabled
CH-1	RJ45	Selectable Constant Voltage and Constant Current
CH-2	RJ45	Selectable Constant Voltage and Constant Current
CONTROLS	RJ45	Programmable for MHT Approved Control Devices

## NODE CONTROL PORT CHARACTERISTICS

Power Supply	24Vdc/0.5Amps for powering external sensors
Sensor Inputs	0-24V/RS485
Connections	MHTi-RJM-3WIRE and MHTi-RJF-3WIRE adapter enables universal connections (24VDC, Trigger, GND) to Control Devices.

## NODE DIMENSIONAL DATA

Node Dimensions	7.303" (185.5mm) L x 2.755" (70mm) W x 0.846" (21.5mm) K
Mounting	4 Mounting holes: 6.948" (176.5mm) L x 2.125" (54mm) W
Origin	Made in USA

## NODE ENVIRONMENTAL REQUIREMENTS

Operating Temperature	-20°C to 50°C
Operating Humidity	10% to 80% RH non-condensing
Storage Temperature	-20°C to 85°C
Storage Humidity	5% to 95% RH non-condensing



**Innovation Lab:**  
241 W. 37th St., Suite 1202, New York City, NY 10018

**HQ & Warehouse:**  
1961 Richmond Ter, Staten Island, NY 10302  
Tel: 718 524 4370  
[www.mht-technologies.com](http://www.mht-technologies.com)



MHT Technologies, reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.